


DT-Mobile PRO COMBI



All fittings are on the inside and thus protected.

DT-Mobile PRO COMBI

The complete station for setting up on construction sites.

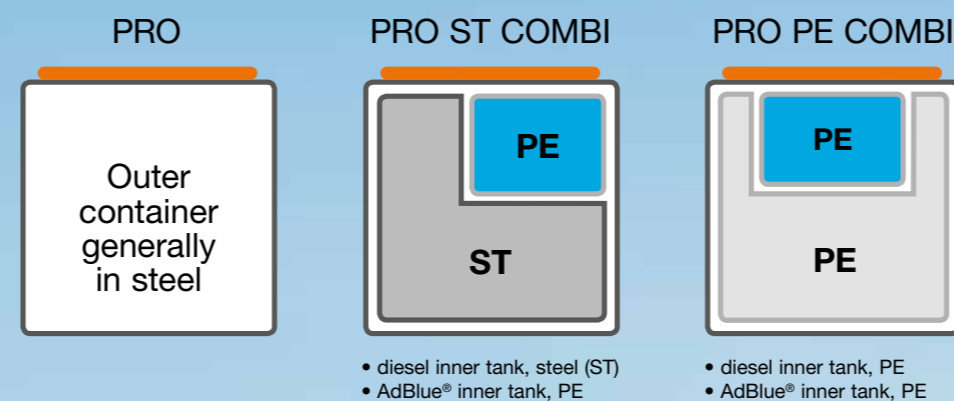


With the diesel tank, you can choose between steel (ST) and the more economic plastic polyethylene (PE)**. The AdBlue® tank generally consists of PE.

	Bipump, 12 V Order no.	Cematic Duo, 24/12 V Order no.	Cematic 72, 230 V Order no.
DT-Mobile PRO PE COMBI 850/100 Basic	10792	10802	10812
DT-Mobile PRO ST COMBI 980/200 Basic	10793	10803	10813
DT-Mobile PRO PE COMBI 850/100 Premium	10794	10804	10814
DT-Mobile PRO ST COMBI 980/200 Premium	10795	10805	10815
DT-Mobile PRO ST COMBI 980/200 Premium Plus	10796	10806	10816

** Replacement service

The transport approval for transporting IBCs with a plastic inner tank for diesel is limited to 5 years. After that, the inner tank must be replaced. We offer you our replacement service including ADR test certificate for attractive terms and conditions. This saves you have the test performed by an expert.

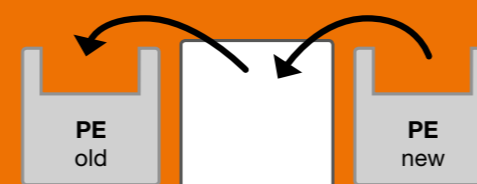

- with ADR transport approval
 - 850/100 L diesel/AdBlue® tank
 - 980/200 L diesel/AdBlue® tank
 - also ideally suited for bio diesel and diesel with increased bio diesel content
 - inner tank with integral function elements such as high-performance pumps, hose reel (with 1" hose), meter and filter with water separator, delivery nozzle holder
 - integral sloshing baffle
 - integral ventilation and pressure relief
 - automatic delivery nozzle
 - nozzle holder
 - powerful electric pump
 - containment volume 110 %
 - approved in water conservation areas
 - dimensions (l x w x h): 130 x 115 x 130 cm
 - weight: approx. 360 - 535 kg
- Version PE:** diesel tank made from polyethylene (PE)**
- Version ST:** diesel tank made from sheet steel (3 mm)
- Basic:** with 4 m filling hose
- Premium:** with 8 m hose, hose reel, K33 meter and filter with water separator
- Premium Plus:** meter with additional access control, tank data management system
- Electric pumps:**
- Bipump, 12 V, 500 W, delivery rate approx. 85 L/min*
 - Cematic Duo, 24/12 V, 420 W, approx. 70/35 L/min*
 - Cematic 72, 230 V, 500 W, approx. 72 L/min*
 - CENTRI SP30, 12 V, 220 W, approx. 25 L/min*

Also available as pure diesel versions

DT-Mobile PRO

- with ADR transport approval
- 980 L diesel tank (steel or PE) with 4 m filling hose (Basic) or 8 m hose, hose reel, K33 meter and filter with water separator (Premium) or additionally with meter with access control and tank data management system (Premium Plus)
- also ideally suited for bio diesel and diesel with increased bio diesel content
- inner tank with integral function elements such as high-performance pumps, hose reel (with 1" hose), meter and filter with water separator, delivery nozzle holder, optionally with quick-couplings for tent heaters and power generators
- integral ventilation and pressure relief
- automatic delivery nozzle, delivery nozzle holder
- high-performance electric pump
- galvanised crane lugs
- dimensions (l x w x h): 130 x 115 x 130 cm
- weight: approx. 365 - 525 kg



	Bipump, 12 V Order no.	Cematic Duo, 24/12 V Order no.	Cematic 72, 230 V Order no.
DT-Mobile PRO PE 980 Basic	10787	10797	10807
DT-Mobile PRO ST 980 Basic	10788	10798	10808
DT-Mobile PRO PE 980 Premium	10789	10799	10809
DT-Mobile PRO ST 980 Premium	10790	10800	10810
DT-Mobile PRO ST 980 Premium Plus	10791	10801	10811